




Serie **SPLIT-BODY PN16...**

Articolo **760001**

CARBON STEEL

Flanged PN16 stainless steel AISI 316-CF8M and carbon steel WCB ball valve, full bore, EN 558 basic series 27 face to face dimension, Fire Safe, Antistatic Device.

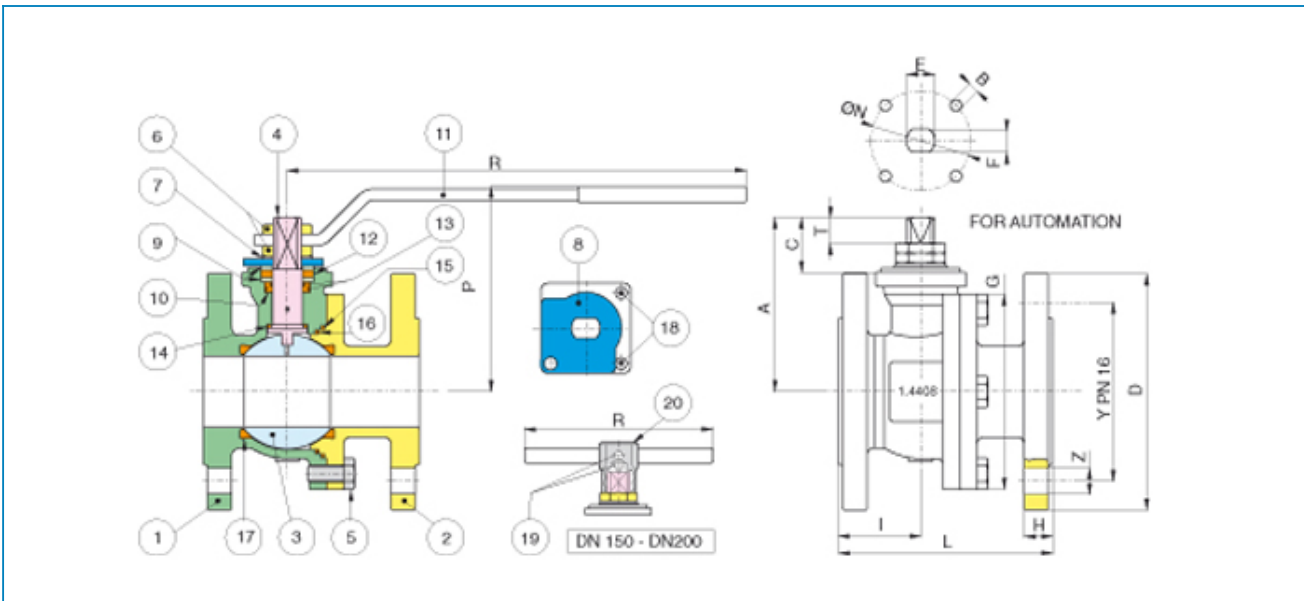

Limiti di temperatura: -10° +160° - Temperature range: -10° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	1.0619	1
2	END CONNECTION	1.0619	1
3	BALL	A182-F304 / A351-CF8	1
4	STEM	A182-F304	1
5	SCREW	DN15 - DN65 DN150 - DN200	4 8
6	NUT	DN125 DN80 - DN200	2 1
7	SPRING WASHER	CARBON STEEL	2
8	90° STOP	CARBON STEEL	1
9	PACKING GLAND	A182-F316	2
10	STEM SEAT	P.T.F.E.	1
11	HANDLE	CARBON STEEL	1
12	STEM SEAL	GRAPHOIL	1
13	O-RING	FKM (VITON®)	2
14	THRUST WASHER	P.T.F.E.	1
15	BODY SEAT	GRAPHOIL	1
16	BODY SEAT	P.T.F.E.	1
17	BALL SEAT	P.T.F.E.	2
18	SCREW	CARBON STEEL	2
19	SCREW	CARBON STEEL	1
20	BODY HANDLE DN150-200	EN-GJL 250	1

* TRUNNION ∆p=10 bar

MISURA SIZE	DN	D	Y	Z	H	I	L	G	P	R	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	95	65	4 X Ø14	16	49	115	71	88	131	52	19	8	M10	7	42-F04	M5	16,3	40	2,50
3/4"	20	105	75	4 X Ø14	18	51	120	73,5	93	131	56	19	8	M10	7	42-F04	M5	29,5	40	3,20
1"	25	115	85	4 X Ø14	18	54	125	90,5	89	174	72,5	27,5	13	M12	8	50-F05	M6	43	40	4,50
1"1/4	32	140	100	4 X Ø18	18	55	130	97	93	174	76	27,5	13	M12	8	50-F05	M6	89	40	5,80
1"1/2	40	150	110	4 X Ø18	18	51,5	140	114	133	250	107	30	10	M16	10	50-F05	M6	230	40	8,10
2"	50	165	125	4 X Ø18	20	57,5	150	136,5	144	321	122	38,5	18	M20	14	70-F07	M8	265	40	11,40
2"1/2	65	185	145	4 X Ø18	18	61	170	167,6	154	321	133	39,5	18	M20	14	70-F07	M8	540	16	15,40
3"	80	200	160	8 X Ø18	20	75,5	180	178,6	173	381	151	43	18	M24	18	102-F10	M10	873	16	20,50
4"	100	220	180	8 X Ø18	20	80	190	208,6	187	381	165	43	18	M24	18	102-F10	M10	1390	16	26,80
5"	125	250	210	8 X Ø18	22	149	325	273	209	381	187	43	18	M24	18	102-F10	M10	1707	16	50,20
6"	150	285	240	8 X Ø22	22	157	350	311	305	700	245	68	27,5	M42	30	125-F12	M12	2024	16	75,70
8"	200	340	295	12 X Ø22	24	190	400	402	348	700	288	68	27,5	M42	30	125-F12	M12	2720	16	104,00
10" *	250	405	355	12 X Ø26	26	225	450	500	422	1200	353	81	47	M52	38	140-F14	M16	-	16	80
12" *	300	460	410	12 X Ø26	28	250	500	560	452	1200	384	81	47	M52	38	140-F14	M16	-	16	226