




Serie **FIDOSFER**

Articolo **9040**

Full bore ball valve for gas, female threaded and gas meter connection, with aluminium T-handle.

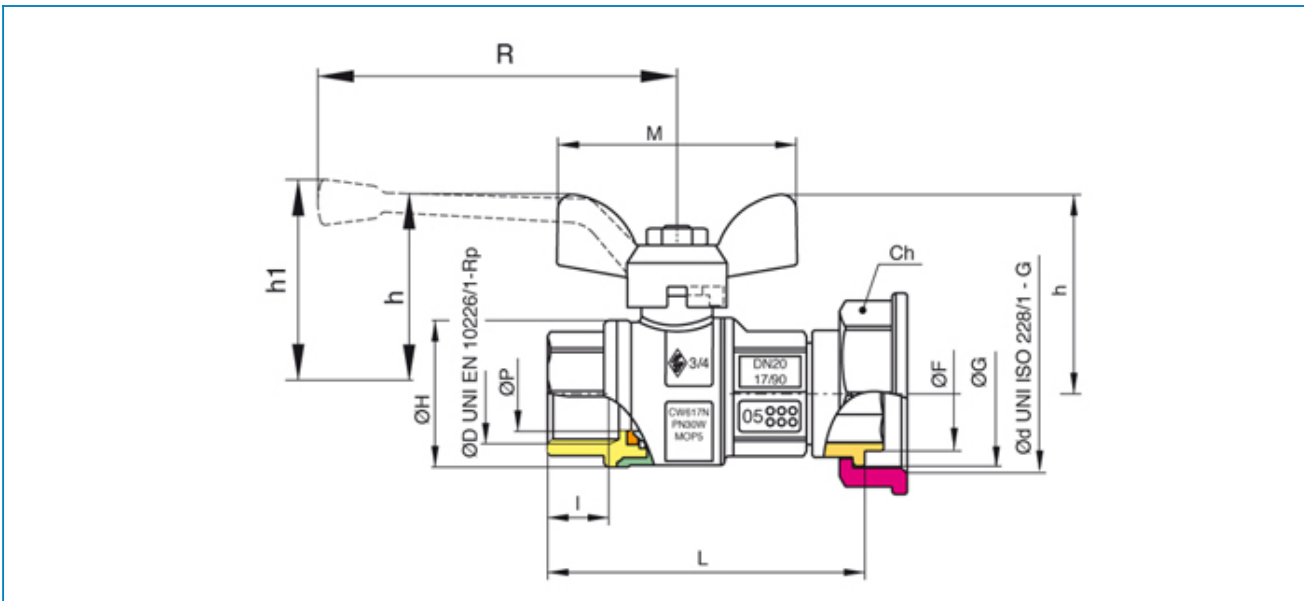

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	OTTONE CW617N UNI EN 12165	1
2	END CONNECTION	OTTONE CW617N UNI EN 12165	1
3	BALL	OTTONE CW617N UNI EN 12165	1
4	STEM	OTTONE CW614N UNI EN 12164	1
5	PACKING GLAND	OTTONE CW614N UNI EN 12164	1
6	T-HANDLE	ALLUMINIO EN-AC 46100 EN 1706	1
7	BALL SEAT	P.T.F.E	2
8	STEM SEAL/THRUST WASHER	P.T.F.E	2
9	O-RING	NBR	1
10	DADO	ACCIAIO CL 04	2

ØD x Ød	BOX	MASTER BOX	CODICE CODE	ØP	ØF	ØG	ØH	M	I	R	h	h1	L	Ch	MOP	Kg
3/4" x 1"1/4	20	40	9040280000	20	31	39,5	39	64	16,3	-	56	-	85	46	5	0,50
1" x 1"1/4	10	20	9040290000	25	31	39,5	49	64	19,1	-	60	-	102	46	5	0,72
*1" 1/2 x 2"	4	8	9040690000	40	46	57	73	-	21,4	160	-	86	130	63	5	1,86
*2" x 2"1/2	2	4	9040700000	50	59	72,5	86	-	25,7	170	-	105	151	80	5	2,63

Limiti di temperatura: -20°C +90°C - Temperature range: -20°C +90°C.

\* Versione con leva in alluminio - Version with aluminium handle.