




Serie **FIDO. SFER**

Articolo **9010**

Full bore ball valve for gas, F/F threaded, with aluminium handle.

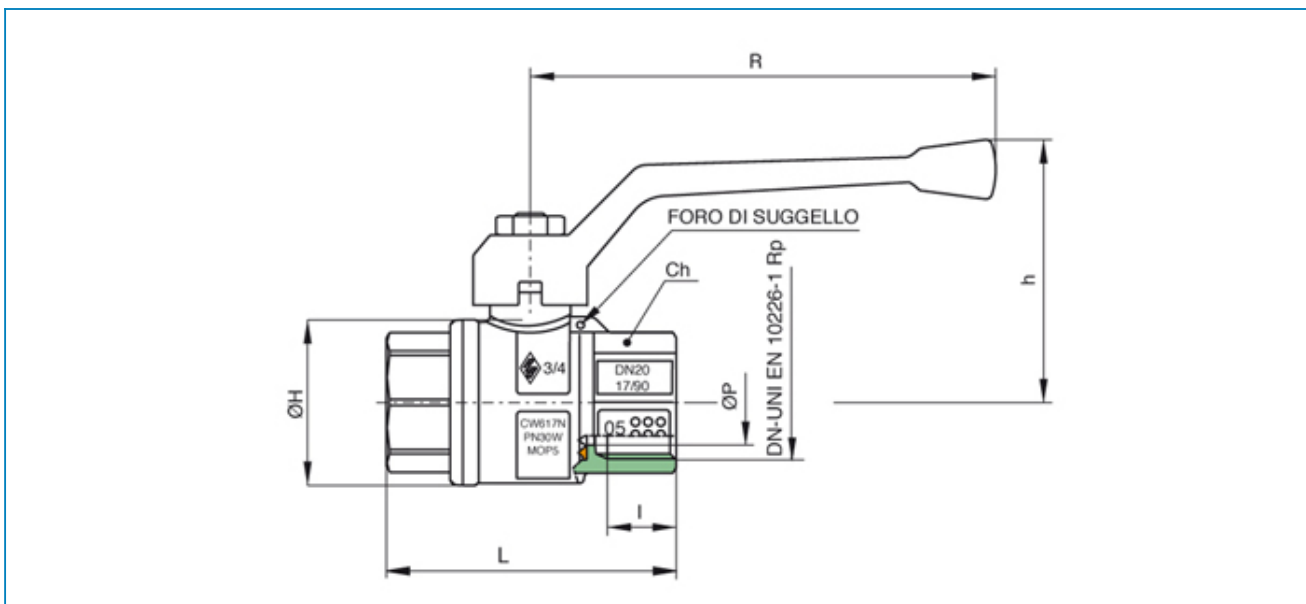

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	OTTONE CW617N UNI EN 12165	1
2	END CONNECTION	OTTONE CW617N UNI EN 12165	1
3	BALL	OTTONE CW617N UNI EN 12165	1
4	STEM	OTTONE CW614N UNI EN 12164	1
5	PACKING GLAND	OTTONE CW614N UNI EN 12164	1
6	T-HANDLE	ALLUMINIO EN-AC 46100 EN 1706	1
7	BALL SEAT	P.T.F.E	2
8	STEM SEAL/THRUST WASHER	P.T.F.E	2
9	O-RING	NBR	1
10	DADO	ACCIAIO CL 04	2

MISURA SIZE	DN	BOX	MASTER BOX	CODICE CODE	ØP	I	L	ØH	Ch	R	h	MOP	Kg
1/4"	8	25	50	9010020000	10	11	51,5	23	20	95	47,5	5	0,14
3/8"	10	25	50	9010030000	10	11,4	51,5	23	20	95	47,5	5	0,12
1/2"	15	50	100	9010040000	15	15	62	33	25	95	51	5	0,21
3/4"	20	25	50	9010050000	20	16,3	69	39	31	110	62	5	0,33
1"	25	20	40	9010060000	25	19,1	83	49	38	110	66	5	0,54
1"1/4	32	10	20	9010070000	32	21,4	96	59	48	160	80	5	0,93
1"1/2	40	6	12	9010080000	40	21,4	108	73	54	160	86	5	1,40
2"	50	4	8	9010100000	50	25,7	127	87	67	170	105	5	2,02
2"1/2	65	2	4	9010120000	65	30,2	152	111	90	205	129	5	3,71
3"	80	-	4	9010140000	80	33,3	177	136	105	205	140	5	5,85
4"	100	-	2	9010180000	100	39,3	214	166	130	260	160	5	10,20

Limiti di temperatura: -20°C +90°C - Temperature range: -20°C +90°C.