


Serie **FIDO. SFER**

Articolo **5980**

Full bore ball valve for gas, F/F threaded, with yellow steel handle.

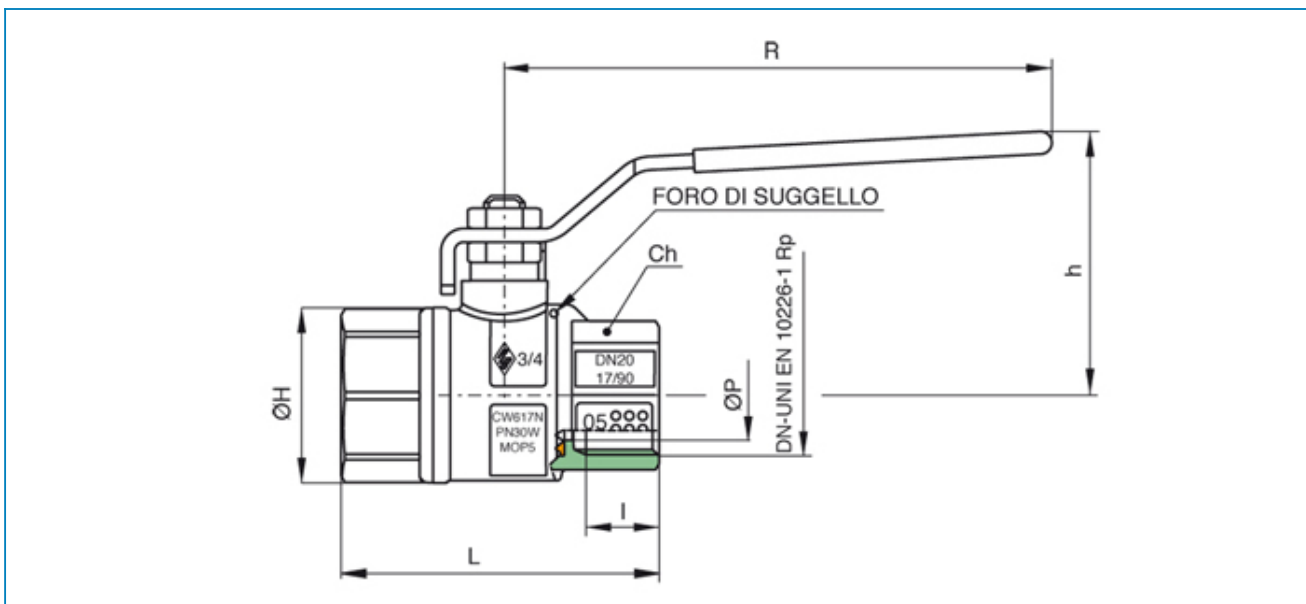

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	OTTONE CW617N UNI EN 12165	1
2	END CONNECTION	OTTONE CW617N UNI EN 12165	1
3	BALL	OTTONE CW617N UNI EN 12165	1
4	STEM	OTTONE CW614N UNI EN 12164	1
5	PACKING GLAND	OTTONE CW614N UNI EN 12164	1
6	T-HANDLE	ALLUMINIO EN-AC 46100 EN 1706	1
7	BALL SEAT	P.T.F.E	2
8	STEM SEAL/THRUST WASHER	P.T.F.E	2
9	O-RING	NBR	1
10	DADO	ACCIAIO CL 04	2

MISURA SIZE	DN	BOX	MASTER BOX	CODICE CODE	ØP	I	L	ØH	Ch	R	h	MOP	Kg
1/4"	8	25	50	5980020000	10	11	51,5	23	20	96	47,5	5	0,15
3/8"	10	25	50	5980030000	10	11,4	51,5	23	20	96	47,5	5	0,14
1/2"	15	50	100	5980040000	15	15	62	33	25	96	51	5	0,22
3/4"	20	25	50	5980050000	20	16,3	69	39	31	121	62	5	0,36
1"	25	20	40	5980060000	25	19,1	83	49	38	121	66	5	0,55
1"1/4	32	10	20	5980070000	32	21,4	96	59	48	151	80	5	0,99
1"1/2	40	6	12	5980080000	40	21,4	108	73	54	151	86	5	1,49
2"	50	4	8	5980100000	50	25,7	127	87	67	160	105	5	1,97
2"1/2	65	2	4	5980120000	65	30,2	152	111	90	206	120	5	3,71
3"	80	-	4	5980140000	80	33,3	177	136	105	206	131,5	5	5,90
4"	100	-	2	5980180000	100	39,3	214	166	130	261	165	5	10,00

Limiti di temperatura: -20°C +90°C - Temperature range: -20°C +90°C.